


GDM1286D-BW

128*64DOTS+WHITE LED BACKLIGHT

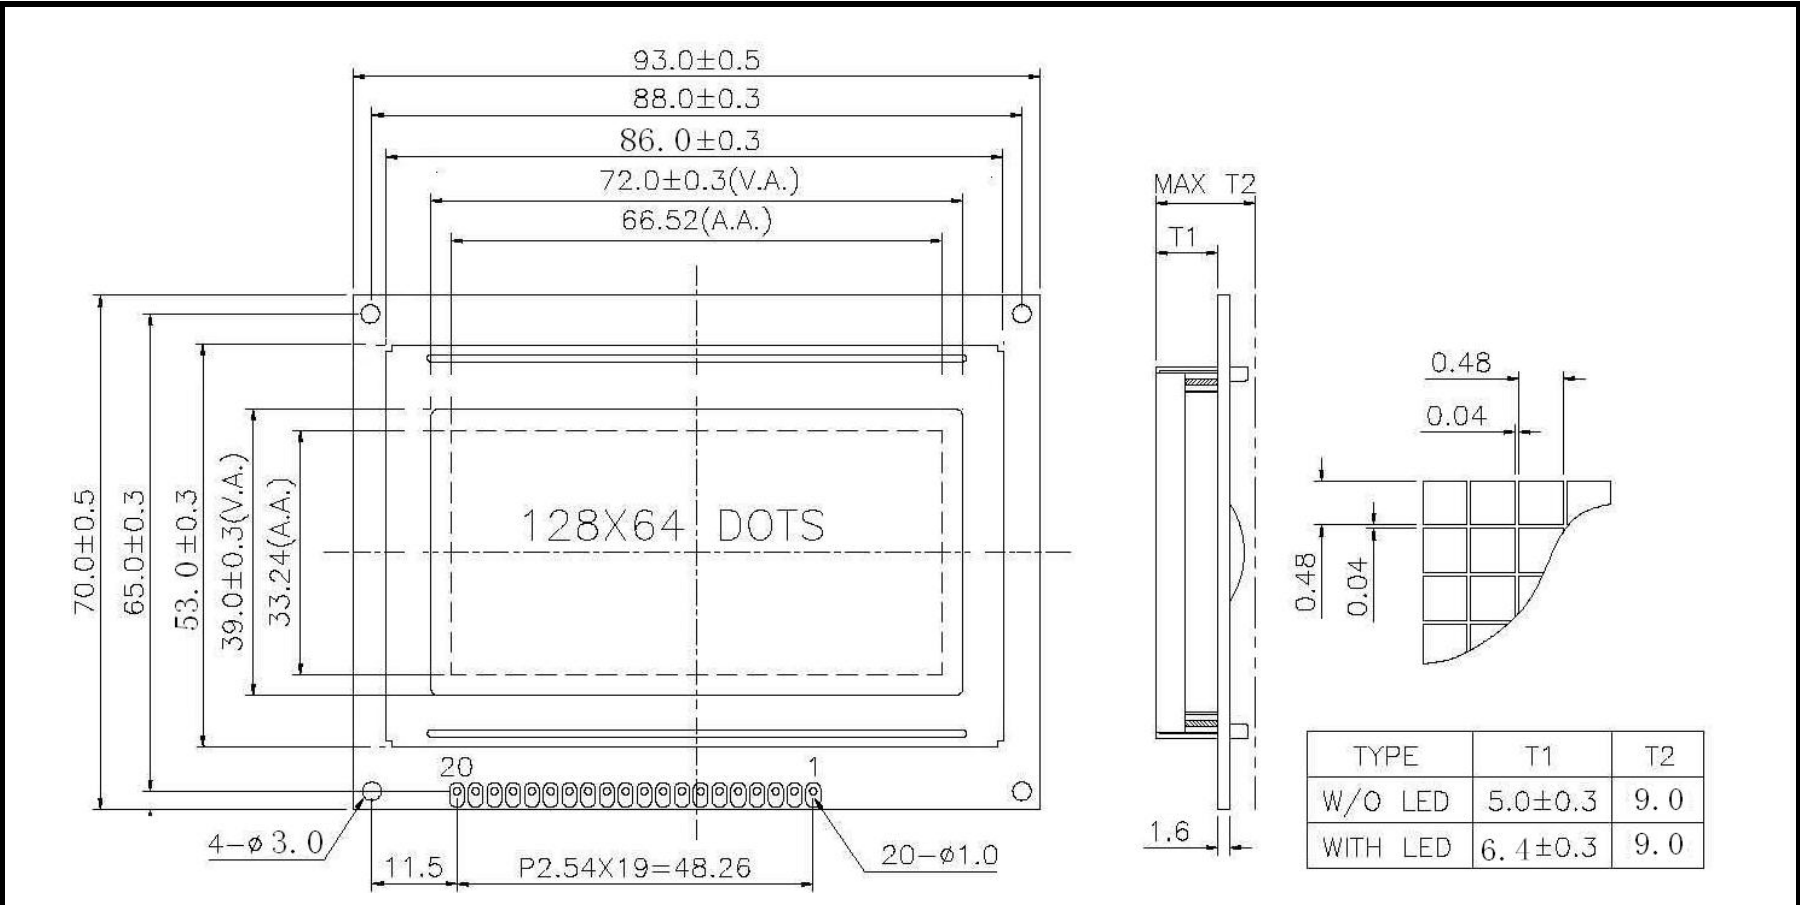

ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min.	Max.	Unit
Supply Voltage(Logic)	$V_{DD}-V_{SS}$	-0.3	7	V
Supply Voltage(LCD)	$V_{DD}-V_o$	-0.3	19	V
Input Voltage	V_i	-0.3	$V_{DD}+0.3$	V
Operating Temp.	T_{opr}	-20	70	°C
Storage Temp.	T_{stg}	-30	80	°C

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size (W x H x T)	93.0 x 70.0 x 9.0	mm
Viewing Area (W x H)	72.0 x 39.0	mm
Dot Pitch (W x H)	0.52 x 0.52	mm
Dot Size (W x H)	0.48 x 0.48	mm
Weight (Reflective/LED)	Approx. 55 / 75	g


ELECTRICAL CHARACTERISTICS (V =5V± 0.25V)

Item	Symbol	Condition Test	Min.	Typ.	Max.	Unit
Input High Voltage	V_{IH}		2		V_{DD}	V
Input Low Voltage	V_{IL}		-0.3		0.8	V
Output High Voltage	V_{OH}	$I_{OH} = -0.2mA$	2.4		V_{DD}	V
Output Low Voltage	V_{OL}	$I_{OL} = 1.6mA$	0		0.4	V
Supply Current	I_{DD}	$V_{DD}= 5.0V$		6	8	mA
LCD Driving Voltage	$V_{DD}-V_o$	$T_a=25^{\circ}C$		11.7		V

INTERFACE DEFINITION

Pin	Symbol	Level	Function
1	V_{SS}	0V	GND
2	V_{DD}	+5V	Power supply for logic
3	V_o		Operating voltage for LCD
4	RS	H/L	H : Data L : Instruction code
5	R/W	H/L	H : Read L : Write
6	E	H,H >L	Enable Signal
7	DB0	H/L	Data bus
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	CS1	H	Chip selection for IC1. Active "H".
16	CS2	H	Chip selection for IC2. Active "H".
17	/RST	L	Reset signal. Active "L".
18	V_{OUT}	-10V	Inside voltage for LCD driving
19	LEDA	+5V	Power supply for LED backlight
20	LEDK	0V	

BLOCK DIAGRAM

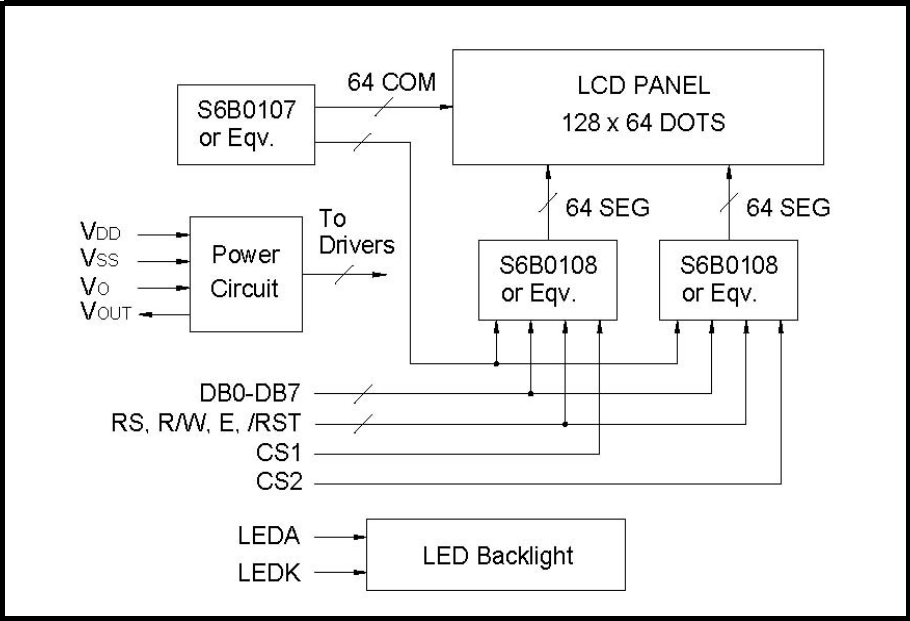

LED BACKLIGHT SPECIFICATIONS (Ta=25°C)

Item	Symbol	Typ.	Max.
Forward Voltage	V_f	4.1	4.3
Forward Current	I_f	80	